

This document provides additional assistance with wiring your Extron IP Link enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific Extron IP Link enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type: Media Player
Manufacturer: Audac
Firmware Version: N/A
Model(s): CMP30

Version History:

Driver Version	Date	IP Link Compiler	GC Version	Notes
3	03/28/2013	1.5.1	3.3.2	Extron Certified. Tested on CMP30.
2	12/19/2012	1.5.1	3.3.2	Fixed Volume and Random status commands. Remove Repeat All and add Repeat Folder.
1	10/18/2012	1.5.1	3.3.2	Initial version.

Driver Notes:

This driver includes Volume Optimization.

IP Link® Device Interface Communication Sheet

Control Commands & States:

Function	USB	CD	Radio
Power Control	On	Off	
Random	On	Off	
Repeat	Single	Folder	Off
Transport	Play Next	Stop Previous	Pause
Volume (Discrete)	0 to 33 in steps of 1		
Volume (Step)	Up	Down	

Status Available:

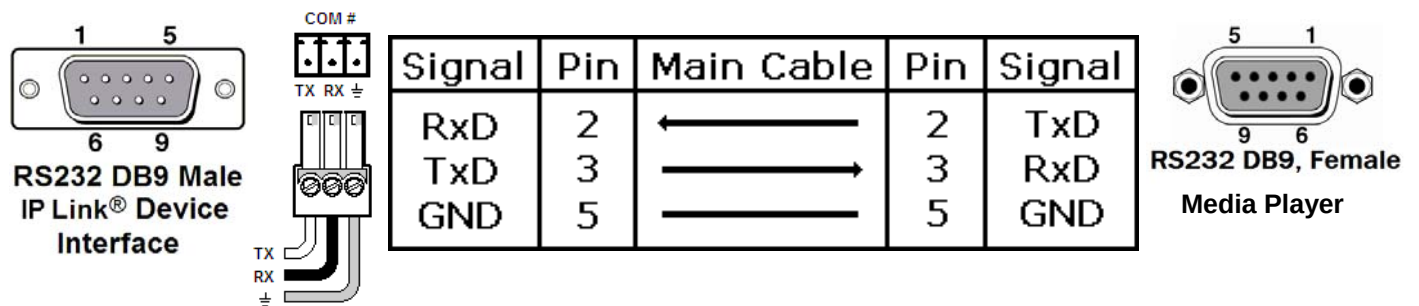
Connection Status	Connected	Disconnected	
Function	USB	CD	Radio
Power Control	On	Off	
Random	On	Off	
Repeat	Single	Folder	Off
Track Status	Value		
Transport	Play	Stop	Pause
Volume (Discrete)	0 to 33 in steps of 1		

MLC60 Series Supported Commands:

Function	USB	CD	Radio
Power Control	On	Off	
Random	On	Off	
Repeat	Single	Folder	Off
Transport	Play Next	Stop Previous	Pause
Volume (Discrete)	0 to 33 in steps of 1		
Volume (Step)	Up	Down	

Cable and Adapter Requirements:

F/M RS232 DB9 Straight Serial Cable

Notes for the Device:**Serial communication:****Port Type:** RS-232**Baud Rate:** 9600**Data Bits:** 8**Parity:** None**Stop Bits:** 1**Flow Control:** None**Pin Assignments Diagram:**

Note: Captive screw connector may also be used as a serial connection.

General Notes: